

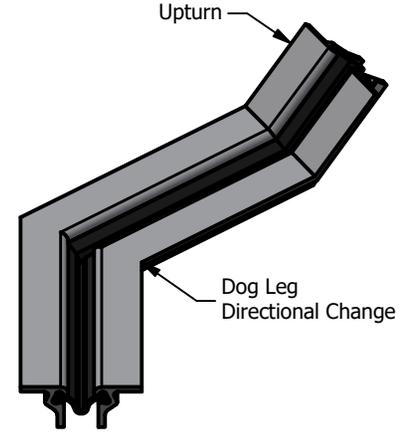



10 | 9 | 8 | 7 | 6 | 5 | 4 | 3 | 2 | 1

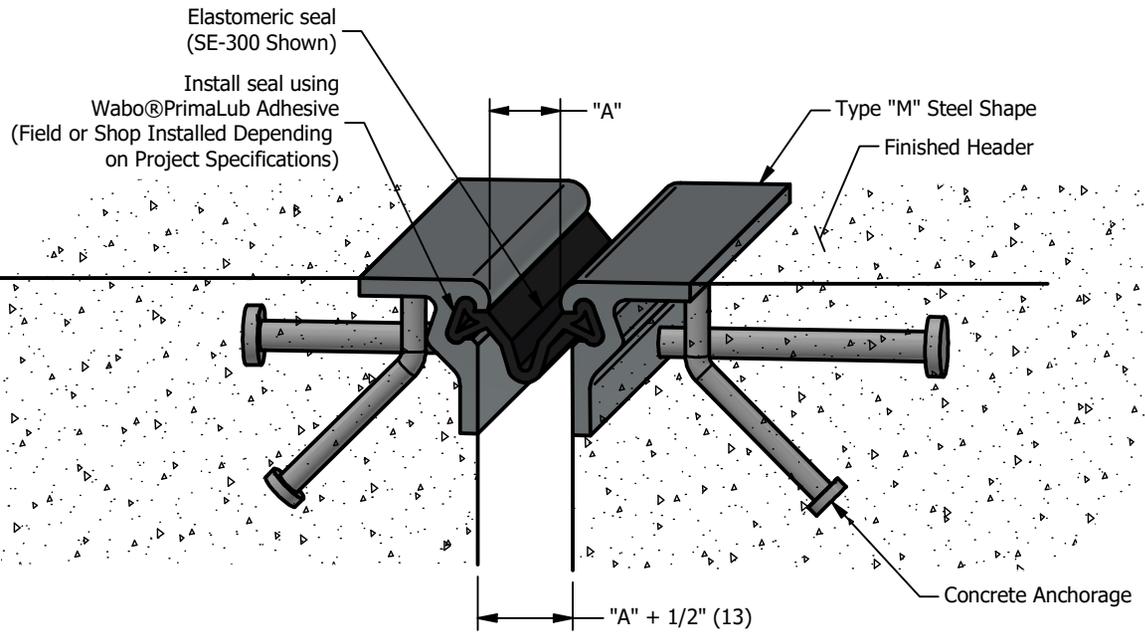

ISO VIEW
Directional Changes Depends
On Your Project Specifications

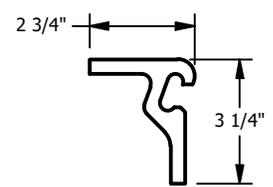

Wabo®StripSeal Type "M"
Cast in Place Condition

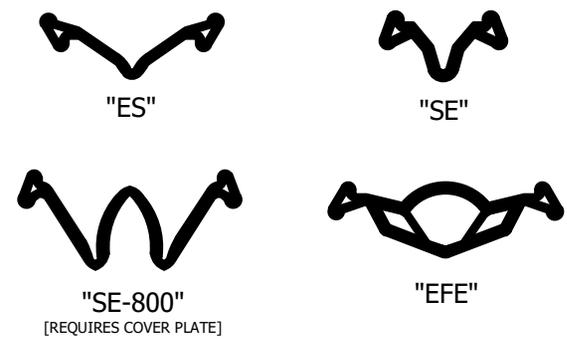

Model Number	Total Movement		Joint Width "A"				Min. Install Width		Horz. Movement @ Max Seal Opening		Vertical Movement	
			Min.		Max.							
	inches	mm	inches	mm	inches	mm	inches	mm	inches	mm	inches	mm
SE-300	3.000	76	0	0	3.000	76	1.500	38	± 1.50	± 38	0.500	13
SE-400	4.000	102	0	0	4.000	102	1.500	38	± 1.25	± 32	0.500	13
SE-500	5.000	127	0	0	5.000	127	2.000	51	± 1.00	± 25	0.500	13
EFE-400	4.000	102	0.500	13	4.500	114	2.500	64	± 1.25	± 32	0.500	13
ES-300	4.000	102	0	0	4.000	102	1.500	38	± 1.50	± 38	0.500	13
ES-400	5.000	127	0	0	5.000	127	2.000	51	± 1.25	± 32	0.500	13
SE-800	8.000	203	0.5	13	8.500	216	4.500	114	± 2.00	± 51	0.500	13

Consult your WBA Representative for factory horizontal changes, severe skews or joint intersections

Design Features

- Rugged design accommodating through HS-20 loading.
- Extrusion cavity mechanically locks all seal profiles for watertight application.
- System can be cast into the concrete slab.
- Accommodates multi-directional movements.
- Custom designs engineered for unique projects.

Watson Bowman Acme Corp.
95 Pineview Drive Amherst, NY 14228
phone: (716) 691-7566 fax: (716) 691-9239
www.wbacorp.com

Sika
BUILDING TRUST

ORIGINAL RELEASE REVISION DESCRIPTION	PK INT	11/20/2025 DATE	CHECKED BY: PPP	CHECKED DATE: 11/28/2025
DRAWING INFORMATION: Wabo®StripSeal MODEL : Type "M"			SCALE: NTS	
1 of 1			DRAWING NO.: C20519	
			REV: 0	

10 | 9 | 8 | 7 | 6 | 5 | 4 | 3 | 2 | 1