



**ISO VIEW**  
 Directional Changes Depends  
 On Your Project Specifications



**TYPE "P" STEEL SHAPE**

**Wabo®StripSeal Type "P"**  
 Cast in Place Condition

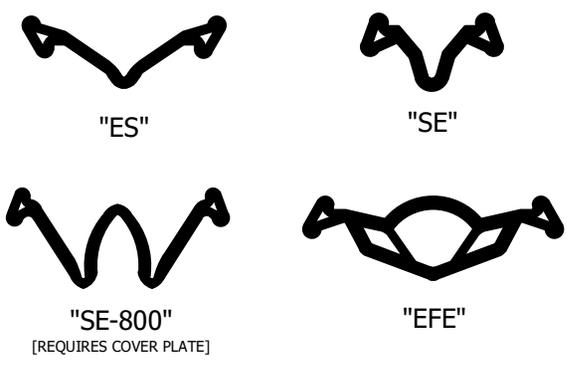

Model Number	Total Movement		Joint Width "A"				Min. Install Width		Horz. Movement @ Max Seal Opening		Vertical Movement	
			Min.		Max.							
	inches	mm	inches	mm	inches	mm	inches	mm	inches	mm	inches	mm
SE-300	3.000	76	0	0	3.000	76	1.500	38	± 1.50	± 38	0.500	13
SE-400	4.000	102	0	0	4.000	102	1.500	38	± 1.25	± 32	0.500	13
SE-500	5.000	127	0	0	5.000	127	2.000	51	± 1.00	± 25	0.500	13
EFE-400	4.000	102	0.500	13	4.500	114	2.500	64	± 1.25	± 32	0.500	13
ES-300	4.000	102	0	0	4.000	102	1.500	38	± 1.50	± 38	0.500	13
ES-400	5.000	127	0	0	5.000	127	2.000	51	± 1.25	± 32	0.500	13
SE-800	8.000	203	0.5	13	8.500	216	4.500	114	± 2.00	± 51	0.500	13

Consult your WBA Representative for factory horizontal changes, severe skews or joint intersections

**Design Features**

- Rugged design accommodating through HS-20 loading.
- Extrusion cavity mechanically locks all seal profiles for watertight application.
- System can be cast into the concrete slab.
- Accommodates multi-directional movements.
- Custom designs engineered for unique projects.

Watson Bowman Acme Corp.  
 95 Pineview Drive Amherst, NY 14228  
 phone: (716) 691-7566 fax: (716) 691-9239  
 www.wbacorp.com

**Sika**  
 BUILDING TRUST

ORIGINAL RELEASE REVISION DESCRIPTION	PK INT	11/20/2025 DATE	CHECKED BY: PPP	CHECKED DATE: 11/28/2025
DRAWING INFORMATION: <b>Wabo®StripSeal</b> MODEL : Type "P"			SCALE: NTS	
1 of 1		DRAWING NO.: C20519		
		REV: 0		

Information provided herein, including but not limited to, any drawing, design, photograph, graphic, or statement(s) ("Material") are proprietary and the property of Watson Bowman Acme Corporation ("Company"). Reproduction, translation, or reduction to any electronic medium or machine readable form, in whole or part, is strictly prohibited, except for the express purpose for which it has been furnished, without prior written consent of company. All materials contained herein are provided by Company for information purposes only. Company reserves the right to amend or withdraw any information contained in the materials without notice. All technical or other advice by Company, whether verbal or written concerning products, or the use of products in specific situations ("Advice") is given by Company and is used at the users own risk.