


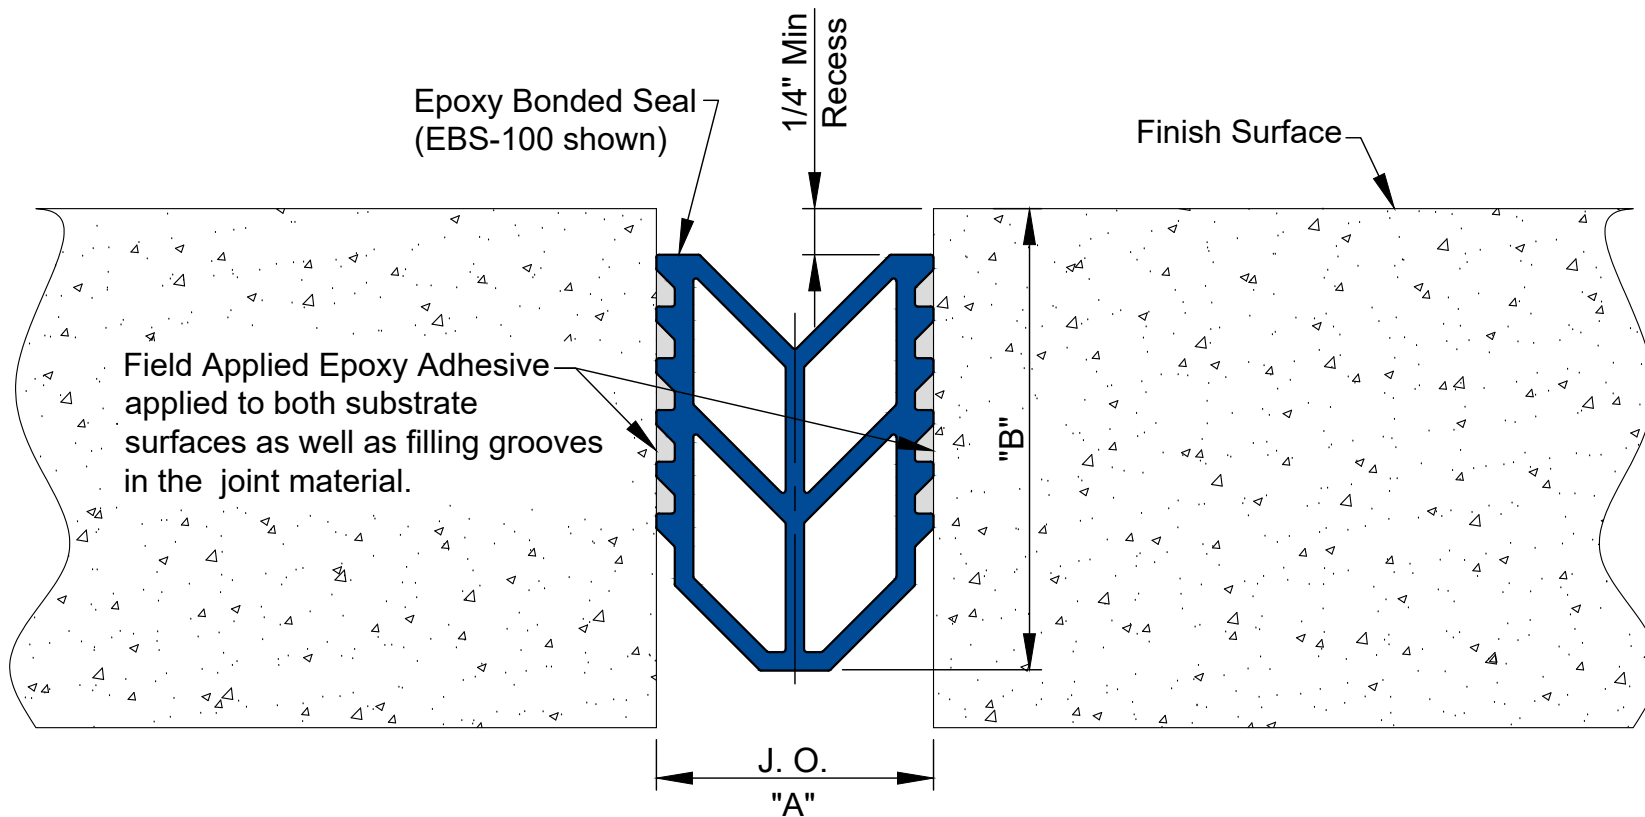

## Epoxy Bonded Seal (EBS)

### Deck to Deck Condition Shown (Same Detail Applies to Deck to Wall Condition)

( ) - Denotes Millimeters

| Model Number | WBA Part Number | Nominal Relaxed Seal Width | Joint Opening @ Midrange Temperature "A" | Min. Joint Opening "A" | Max. Joint Opening "A" | Total Mvmt Rating (MR) | Seal Depth "B" |
|--------------|-----------------|----------------------------|------------------------------------------|------------------------|------------------------|------------------------|----------------|
| EBS-100 EPDM | 2211            | 1 1/2" (38)                | 1" (25)                                  | 1/2" (13)              | 2-1/2" (64)            | 2" (51)                | 2-1/2" (64)    |
| EBS-200 EPDM | 2213            | 3" (76)                    | 2" (51)                                  | 1" (25)                | 4" (102)               | 3" (76)                | 2-3/4" (70)    |

Min. & Max values are after Movement occurs. J.O @ Midrange is the recommended size of the opening at installation.

|                      |                         |
|----------------------|-------------------------|
| PROJECT NAME:        | -                       |
| PROJECT LOCATION:    | -                       |
| CUSTOMER:            | -                       |
| DRAWING DESCRIPTION: | Epoxy Bonded Seal (EBS) |

A WBAasics™ Product by Watson Bowman Acme

Information provided herein, including but not limited to, any drawing, design, photograph, graphic, or statement(s) ("Materials") are proprietary and the property of Watson Bowman Acme ("Company"). Reproduction, translation, or reduction to any electronic medium or machine readable form, in whole or part, is strictly prohibited, except for the express purpose for which it has been furnished, without prior written consent of Company. All Materials contained herein are provided by Company for information purposes only. Company reserves the right to amend or withdraw any information contained in the Materials without notice. All technical or other advice by Company, whether verbal or written, concerning products, or the use of products in specific situations ("Advice") is given by Company and is used at the Users own risk.

|                     |                              |
|---------------------|------------------------------|
| DETAILED BY:<br>JPK | DATE:<br>04/15/2021          |
| CHECKED BY:<br>WBA  | CURRENT ISSUE:<br>04/15/2021 |
| SCALE:<br>NTS       | WBA JOB NO:<br>-             |
| SHEET NO:<br>1      | DRAWING NO:<br>A35009        |